


PRONTO-Si

0.3 nW - 800 mW Power Probe with Touch Screen Controls

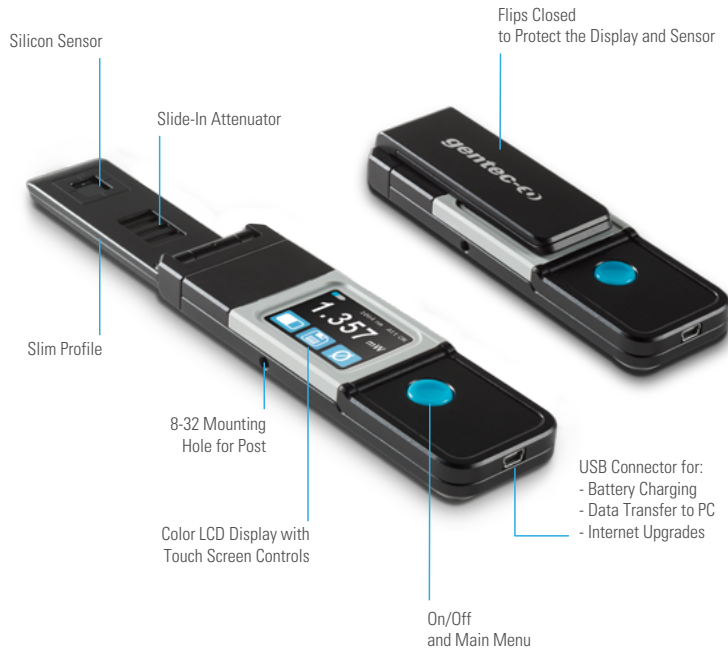

KEY FEATURES

- 1. POCKET-SIZE**
This low power laser probe is so compact it fits in your pocket!
- 2. SLIM PROFILE**
The sensor part is only 6 mm thick, allowing it to fit into tight spaces
- 3. EASY-TO-USE**
The touch screen color LCD allows for a friendly user interface. You can make a measurement with just the touch of a button!
- 4. VERY LOW POWER MEASUREMENTS**
Thanks to its very low noise level of only 10 pW, the Pronto-Si measures powers as low as 0.3 nW
- 5. SLIDE-IN ATTENUATOR**
Just slide the OD1 integrated filter to the ON position and you can measure up to 800 mW of continuous power at 1064 nm (maximum power varies with wavelength)
- 6. DATA LOGGING**
Save your data to the internal memory and then transfer it to your PC over the USB connection
- 7. OPTIONAL FIBER OPTICS ADAPTOR**
The fiber optics adaptor included in the Pronto-Si-FC model is held securely in place with a set screw and is compatible with OD attenuators
- 8. SERIAL COMMANDS**
Serial commands are available to let you take full control of your Pronto from your PC.

AVAILABLE MODELS




USER INTERFACE


3 Displays for the Measurements




Displays the measured value with large digits so you can see them from a distance




Adds a bargraph below the measured value, for an intuitive understanding of the trend of your laser




In addition to the Real Time value, the device displays the lowest and highest values



Save your Data and Transfer it to your PC



Adjust the Wavelength



Set the Brightness and Orientation

SLIDE-IN ATTENUATOR



DATA TRANSFER TO PC



Watch the Demo video available on our website at www.gentec-eo.com

DISPLAYS & PC INTERFACES

ENERGY DETECTORS

POWER DETECTORS

HIGH POWER SOLUTIONS

PHOTODETECTORS

THZ DETECTORS

OEM DETECTORS

SPECIAL PRODUCTS

BEAM DIAGNOSTICS

PRONTO-Si



*Also traceable to NRC-CNRC

SPECIFICATIONS

PRONTO-Si

MAX AVERAGE POWER* (ATTENUATOR OFF / ATTENUATOR ON)	80 mW / 800 mW
EFFECTIVE APERTURE	10 x 10 mm
INTERFACE	Touch Screen Color LCD Display

MEASUREMENT CAPABILITY

Spectral Range	320 - 1100 nm
Attenuator OFF	320 - 1100 nm
Attenuator ON	400 - 1100 nm
Power Range*	0.3 nW - 800 mW at 1064 nm
Attenuator OFF	0.3 nW - 80 mW at 1064 nm
Attenuator ON	3 nW - 800 mW at 1064 nm
Noise Equivalent Power	10 pW at 980 nm
Response Time	0.2 sec
Measurement Accuracy	From $\pm 1.5\%$ to $\pm 7.5\%$ (wavelength-dependent)
Display Resolution	1 pW

DAMAGE THRESHOLDS

Maximum Average Power Density	100 W/cm ²
Maximum Average Power	800 mW (with Attenuator ON)

USER INTERFACE

Displays	Real Time, Bar Graph and Min/Max
Measurement Controls	Zero Offset, Wavelength Selection and Reset Data
Data Acquisition and Transfer	Simple On/Off Controls, saves to on-board memory and transfers data to the PC using the USB connection
Screen Personalization	Orientation and Brightness controls
Battery Indicator	On-screen indicator with 4 levels

GENERAL SPECIFICATIONS

Display Type	Touch Screen Color LCD
Display Size	28.0 x 35.0 mm (128 x 160 pixels)
Backlight	Adjustable
Internet Upgrades Via	USB port
Data Storage	50,000 pts
Battery Type	Rechargeable Li-ion
Battery Life	17 hours (with brightness set at 25%)
Battery Recharge Via	USB port
Operating Temperature Range	15 - 28 °C (max 80% RH)

PHYSICAL CHARACTERISTICS

Effective Aperture	10 x 10 mm
Sensor	Silicon
Attenuator	Integrated Slide-In OD1 Attenuator
Mounting Hole (for Post)	1 x 8-32
Dimensions (Open)	41.0W x 212.0L x 15.0D mm (Sensor part is only 6.0D mm)
Dimensions (Closed)	41.0W x 134.0L x 21.5D mm
Weight	150 g

ORDERING INFORMATION

Product Name	PRONTO-Si
Product Number (without stand)	202963
NEW Accessories	Threaded adaptor for PRONTO-Si Fiber adaptors (see page 206)

Specifications are subject to change without notice // Compatible stand: P/N 200160

* See curves (page 153) for maximum power at other wavelengths